



Ideal for restaurants, bars, canteens and much more!

Model #
F92EKDPS
Made Italy



Integral tank filters



Thermal & acoustic insulation

“Catch the Wave!”

LAMBER dishwashers are less expensive at purchase and less expensive to use

- High temperature with booster
- Only 1/2 gallon of water per cycle
- Soap, rinse & drain pumps included
- 30 racks per hour
- Double panels, silent operation
- Digital readings (wash & rinse Temp.)
- Soft start motor
- 2, 3, 4, and 15 minutes cycles standard
- 3 racks (20" x 20") and 2 cutlery containers included

F92EKDPS DISHWASHER

Dimensions	33" H x 23 ¾" W x 25 ¾" D
Volts	208/240
Hz	60
Amp	29
Circuit Breaker	40
Watts	6650
Cycle	2, 3, 4, 15 mins
Clearance	12 ½"
Door Opening	12.6"
Racks	per hour: 1-60
Rack Size	20" x 20"
Water Consumption	per cycle: ½ gal
Hard Water	120°F incoming water required



lamber
Made in Italy



A variety of models
to choose from

F92EKDPS - Under counter dishwasher

Features and Benefits

Stainless steel construction AISI 304 18/10: 208 – 240 volts, single phase.

Double skin with acoustic & thermal insulation Less water consumption and energy efficient.

Wash tank slanted with rounded edges Seamless interior prevents leakage.

Rotating stainless steel upper & lower wash arms Longer lasting and easier to clean.

Digital read out For easy read.

Automatic loading tank Tank fills up as soon as the machine is turned on.

Integral tank filter kit Prevents food particles getting into the machine.

Rinse aid dispenser and detergent pump Dispenses detergent and rinse aid efficiently.

Door opening safety device Machine shuts off automatically.

Thermo control Guarantees selected temperature for every rinse cycle and when machine is not in use. **Security thermostat** Automatic booster shut off.

Extractable control panel For easy maintenance.

Soft Start Prevents over pressure water spillage and easy on glassware and china.

Undercounter dishwasher 1) F92EKDPS - (Soft Start) with booster, rinse, drain & soap pumps.
2) F92EKS - (Soft Start) with booster, rinse, & soap pumps (without drain).

Included accessories (2) baskets, (1) general basket, (2) cutlery containers.

Warranty (2) year parts and labor.



SIZE:
 23 5/8" W x 25 1/2" D x 32 1/4" H
 Cycle period: 2-3-4 minutes
 Capacity per hour:
 Baskets/H: 30/20/15
 Dishes/H: 540/360/270
 Dishes per basket 12÷18

- Undercounter dishwasher;
- Stainless steel construction 18/10 AISI304;
- Wash cycle time: 2-3-4 minutes;
- Endless cycle: max 15 minutes;
- Soft touch electronic control panel;
- Temperature's electronic display;
- Double skin with thermic and acoustic insulation;
- Cycle start with soft-start system;
- Stainless steel lower and upper rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- Self-washing slanted tank with rounded edges;
- Integral tank filters;
- Pressed self-cleaning door;
- Extractable control panel for an easy maintenance;
- Rinse aid dispenser;
- Detergent pump;
- Automatic tank loading;
- Door opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non stop work;
- Security thermostat;
- Certifications: UL, UL Sanitation;




F92EKS F92EKDPS

Accessories:
 2 baskets for dishes;
 1 generic basket;
 2 cutlery containers;

OPTIONS
 • Tank drain unit with filter,
 • Stainless steel base H17,72 inch

These dimensions refer to F92EKS model
 -note: Water Outlet 1" 1/4

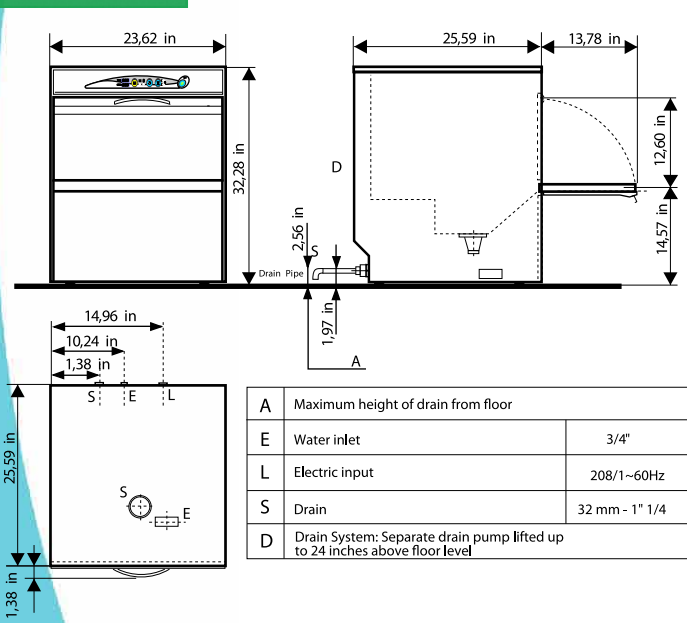

Specifications	F92EKS / F92EKDPS	
VOLTAGE	208 V1ph 60Hz	V
WASHING PUMP	650	W
WASH TANK ELEMENTS	2000	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	6650	W
MAX CURRENT INTENSITY	34	A
PLATES CLEARANCE	12,60	inch
WORK HEIGHT	14,57	inch
TANK CAPACITY	4,8	Gal.
BOILER CAPACITY	1,6	Gal.
PUMP DELIVERY	69	Gal/min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	2,40	Lt.
WATER CONSUMPTION PER HOUR	52	Lt.
WATER PRESSURE	20 ± 5	psi
WATER HARDNESS	5 ÷ 10	TH(°F)
RINSING WATER TEMPERATURE	179 ÷ 194	°F
WATER INLET	3/4"	inch
WATER OUTLET	1" 1/4 (3/4 - EKDPS)	inch
NET WEIGHT	152	Lbs
GROSS WEIGHT	165	Lbs
PACKING SIZE	24,80W x 28,37D x 44,09H	inch
NOISE LEVEL	<60	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.